TOPEAGLE®

867 系列/SERIES

单针/双针综合送料平缝机


SINGLE/DOUBLE NEEDLE COMPOUND FEED LOCKSTITCH SEWING MACHINE



TOPEAGLE®

867 系列/Series

代码图/Code diagram

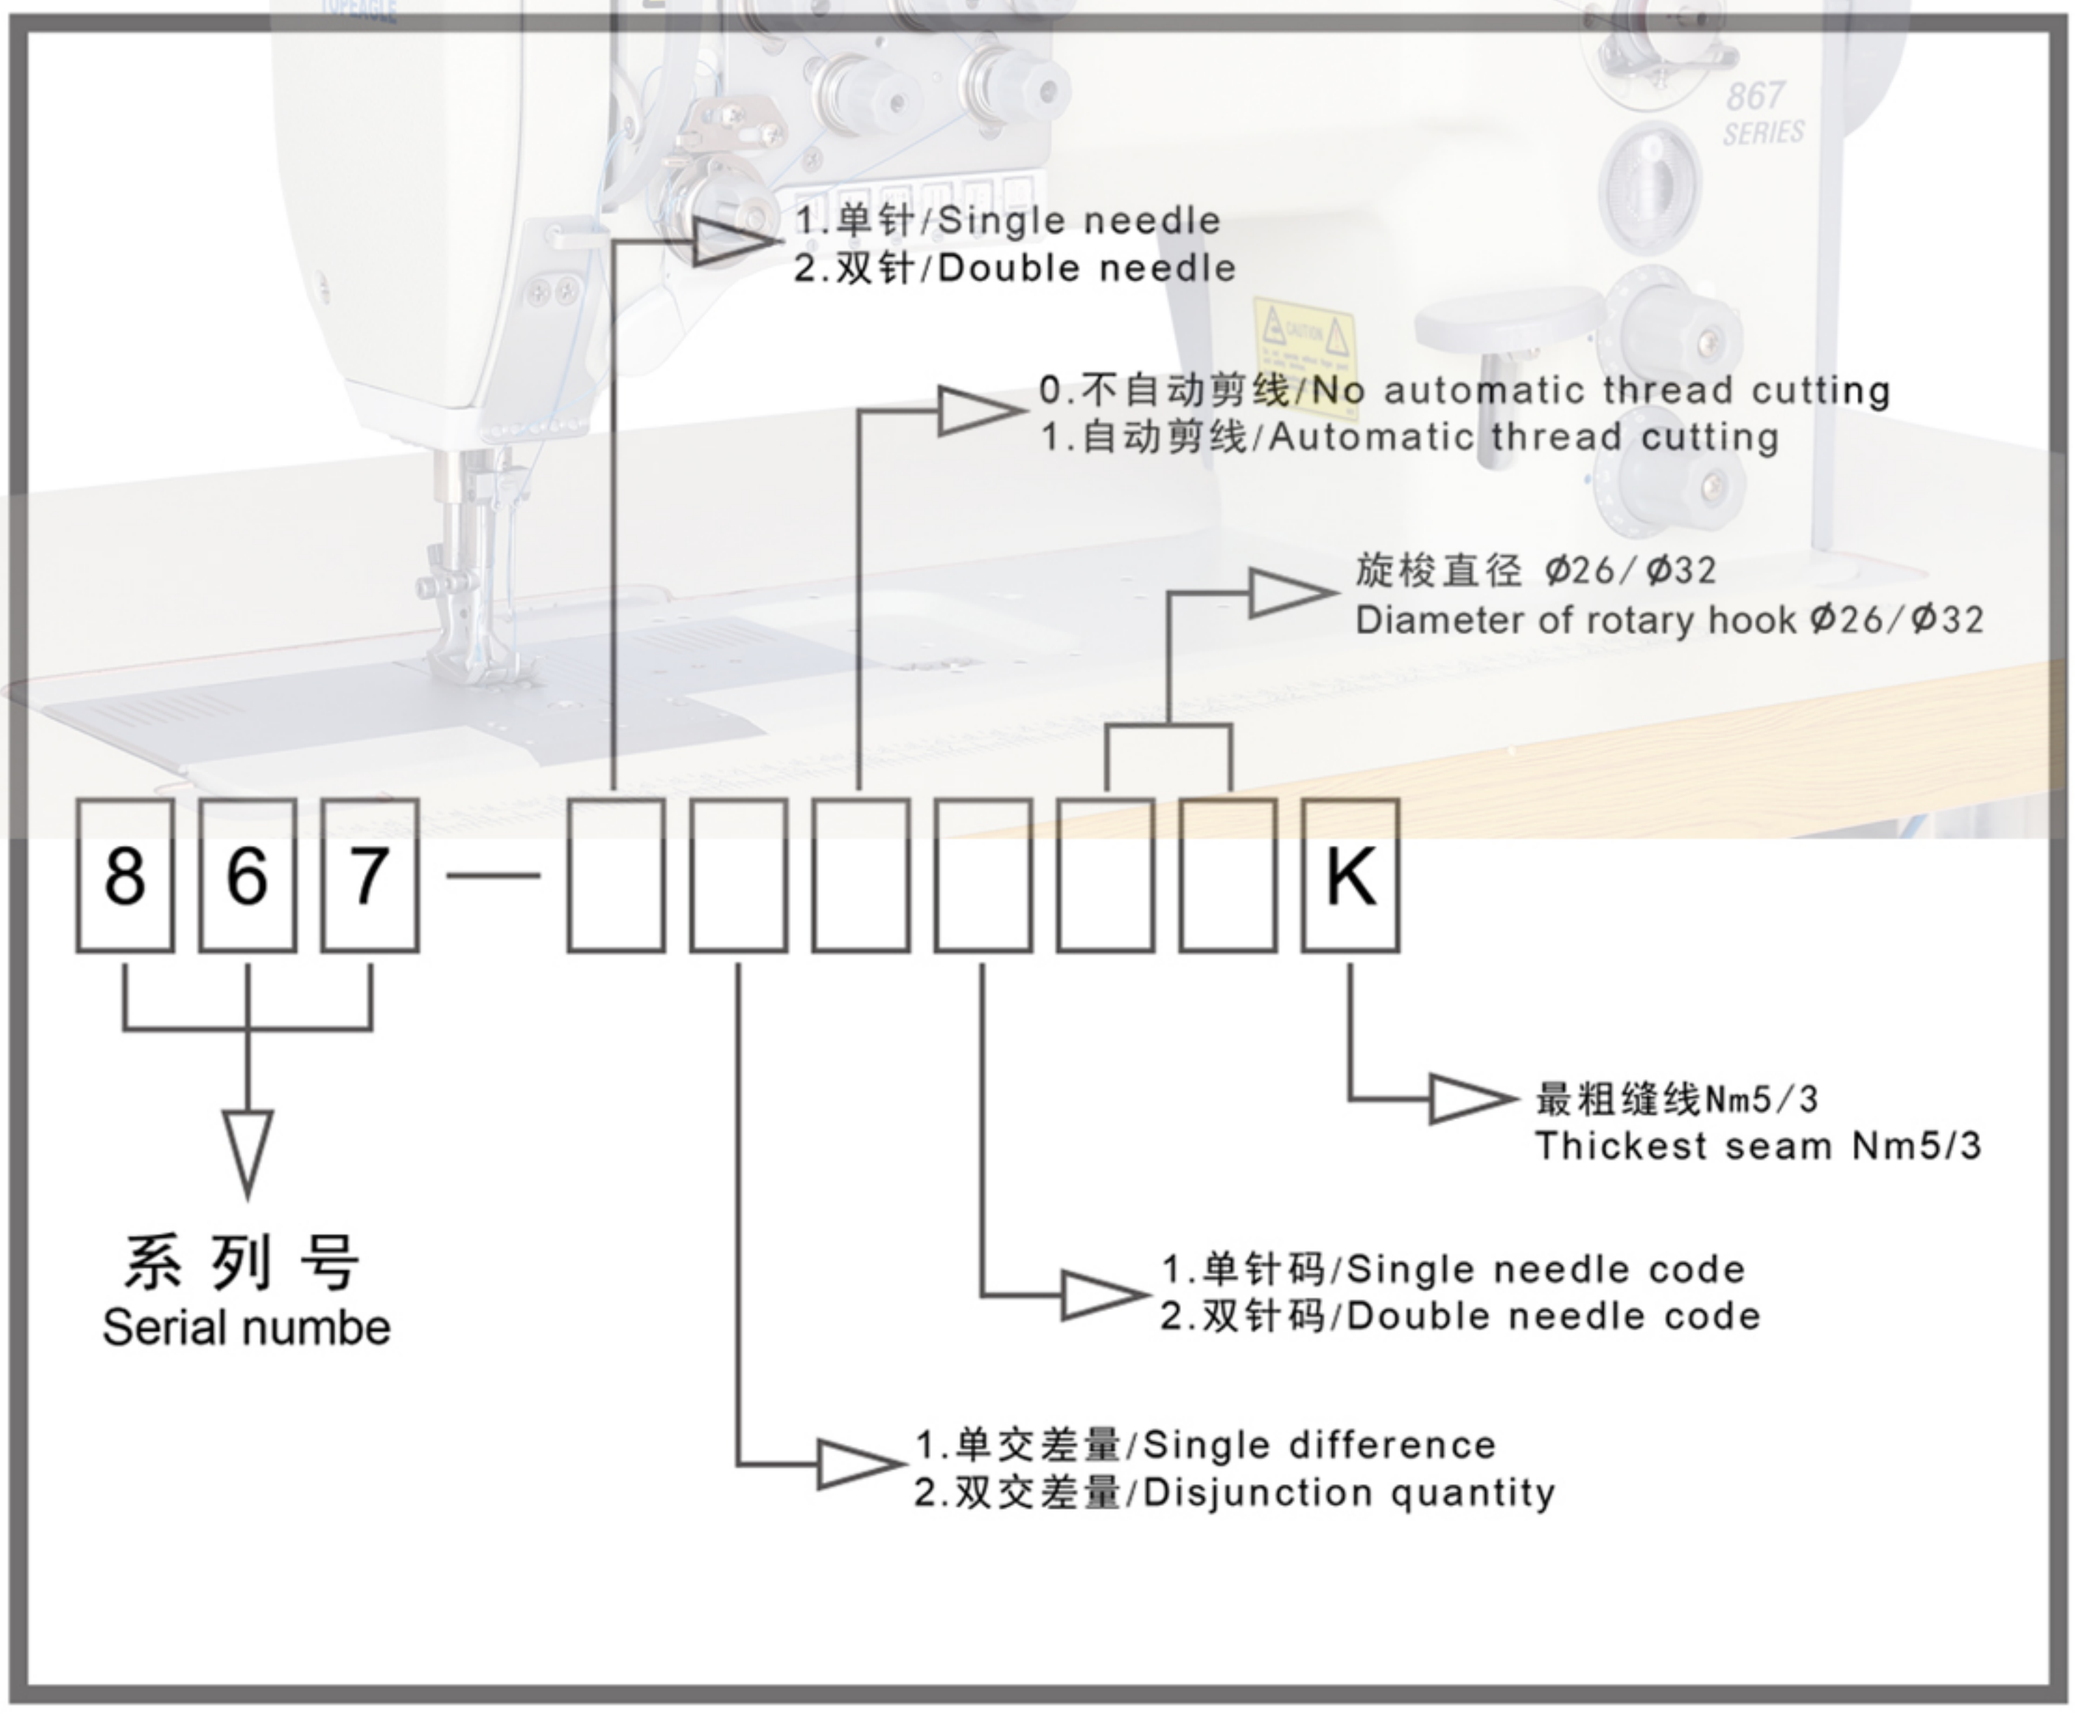

Nominal voltage 额定电压	Power consumption 功率	Weight complete 机头重量	Dimensions (Length,Width,Height) 尺寸(长,宽,高)	mm	
[V][Hz]	[KVA]最大值	[Kg]	[mm]	[mm]	[NL] [Bar]
1 x 200 ~ 240V, 50/60Hz	0.75	70	750x390x730	0~12	4.0 6.0

Tpye	Specifications	LED	Presser foot life	Lock stitch	Looper crossline	Needle thread monitor
型号 DPx35	规格 90-180	工作灯	压脚提升高度 0~20mm	锁式线迹	旋 梭	操作空间 335x120
System	Nm		A	301		C D




867-110126
867-111126
867-110132
867-111132
867-110132K
867-111132K

应用 Applications



功能 Function

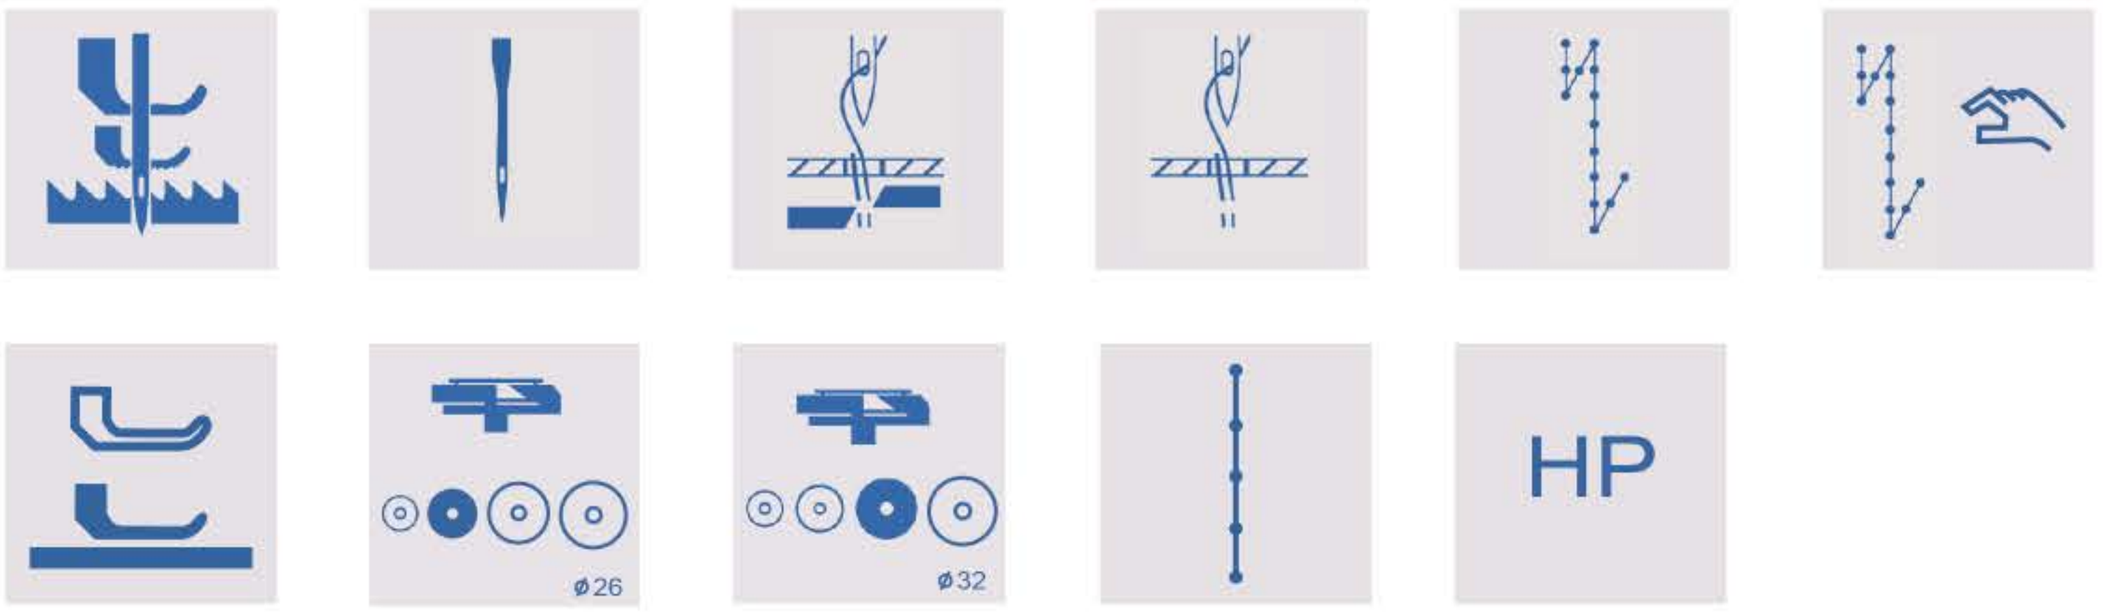

工作范围

- ☑ 最大针码长度为9mm（“K”为12mm）
- ☑ 最粗缝线为Nm10/3（“K”为Nm5/3）
- ☑ 最高缝速为3000针/分（“K”为1500针/分）

产品特点

- ☑ 强劲的三同步送料系统包括下送料，针送料和交替压脚上送料，确保面料的无忧输送且无移位
- ☑ 压脚抬升高度可达20mm，便于处理大面积缝料
- ☑ 压脚冲程最大可达9mm，允许安全爬越不同缝料的厚度
- ☑ 超大臂下空间（335mm宽和125mm高）便于操作大面积缝料
- ☑ 高效的基本功能如自动剪线、自动倒回缝和气动抬压脚
- ☑ ø32超大旋梭比标准旋梭增加了70%的梭线容量，提高了工作效率

Scope of sewing

- ☑ The maximum pin length is 9mm （“K”为12mm）
- ☑ The roughest stitches are Nm10/3（“K”为Nm8/3）
- ☑ The maximum sewing speed is 3000 stitches/min （“K” is 1500 stitches/min）

Product Features

- ☑ The powerful three - step feeding system with bottom feed,needle feed and alternating top feed guarantees trouble-free and displacement-free material feed
- ☑ The lifting height of the pressure foot can reach 20mm, which is convenient to handle large area of joint material
- ☑ The high top feed stroke up 9 mm allows a sefeclimbing over differently high material plies
- ☑ The large clearance (335 mm wide and 125 mm high) facilitates the handing of large-area workpieces
- ☑ Efficient basic functions such as automatic line cutting, automatic back seam and gas Presser foot
- ☑ Increased productivity due to the ø32 hook with a 70% higher bobbin capacity in comparison to thestangdard hook




867-110226
867-111226
867-110232
867-111232
867-110232K
867-111232K

应用 Applications



功能 Function

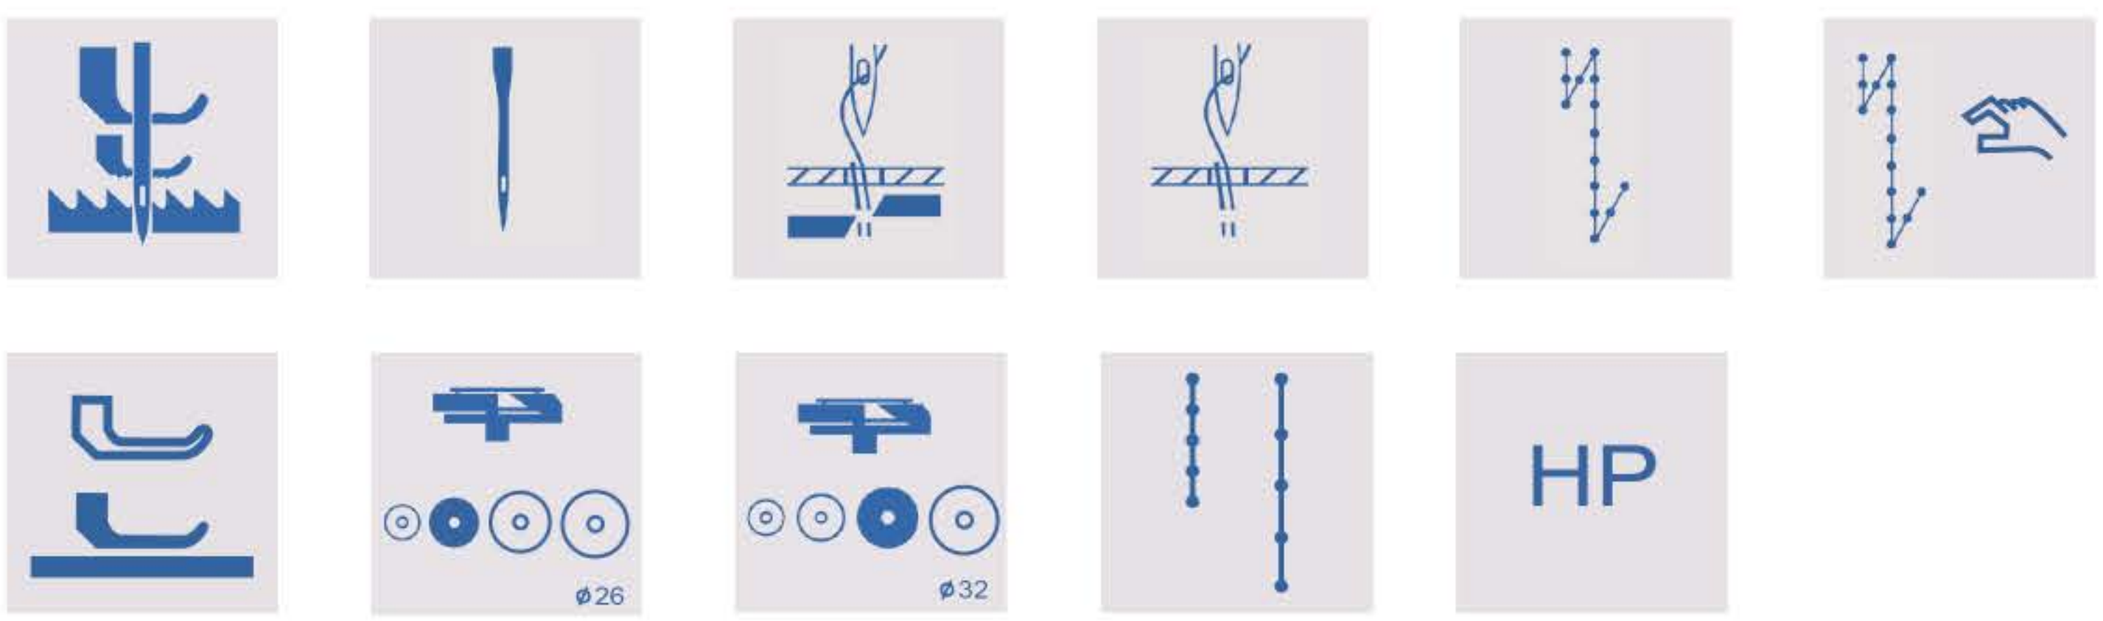

工作范围

- ☑ 最大针码长度为9mm（“K”为12mm）
- ☑ 最粗缝线为Nm10/3（“K”为Nm5/3）
- ☑ 最高缝速为3000针/分（“K”为1500针/分）

Scope of sewing

- ☑ The maximum pin length is 9mm （“K”为12mm）
- ☑ The roughest stitches are Nm10/3（“K”为Nm8/3）
- ☑ The maximum sewing speed is 3000 stitches/min （“K” is 1500 stitches/min）

产品特点

- ☑ 强劲的三同步送料系统包括下送料，针送料和交替压脚上送料，确保面料的无忧输送且无移位
- ☑ 压脚抬升高度可达20mm，便于处理大面积缝料
- ☑ 压脚冲程最大可达9mm，允许安全爬越不同缝料的厚度
- ☑ 超大臂下空间（335mm宽和125mm高）便于操作大面积缝料
- ☑ 高效的基本功能如自动剪线、自动倒回缝和气动抬压脚
- ☑ ø32超大旋梭比标准旋梭增加了70%的梭线容量，提高了工作效率

Product Features

- ☑ The powerful three - step feeding system with bottom feed,needle feed and alternating top feed guarantees trouble-free and displacement-free material feed
- ☑ The lifting height of the pressure foot can reach 20mm, which is convenient to handle large area of joint material
- ☑ The high top feed stroke up 9 mm allows a sefeclimbing over differently high material plies
- ☑ The large clearance (335 mm wide and 125 mm high) facilitates the handing of large-area workpieces
- ☑ Efficient basic functions such as automatic line cutting, automatic back seam and gas Presser foot
- ☑ Increased productivity due to the ø32 hook with a 70% higher bobbin capacity in comparison to thestangdard hook




867-120126
867-121126
867-120132
867-121132
867-120132K
867-121132K

应用 Applications



功能 Function

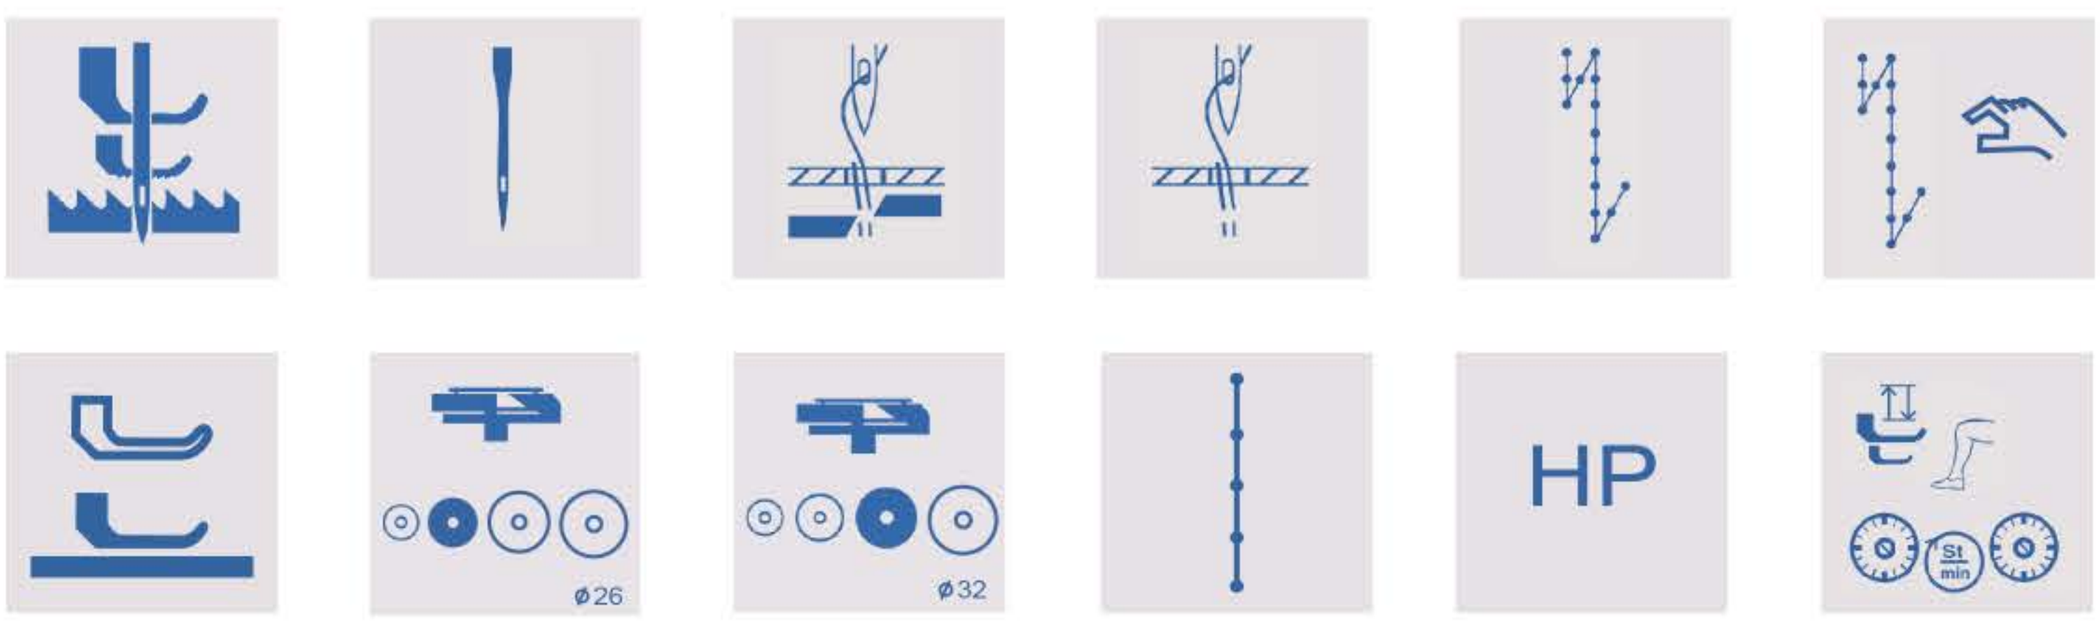

工作范围

- ☑ 最大针码长度为9mm（“K”为12mm）
- ☑ 最粗缝线为Nm10/3（“K”为Nm5/3）
- ☑ 最高缝速为3000针/分（“K”为1500针/分）

产品特点

- ☑ 强劲的三同步送料系统包括下送料，针送料和交替压脚上送料，确保面料的无忧输送且无移位
- ☑ 压脚抬升高度可达20mm，便于处理大面积缝料
- ☑ 压脚冲程最大可达9mm，允许安全爬越不同缝料的厚度
- ☑ 超大臂下空间（335mm宽和125mm高）便于操作大面积缝料
- ☑ 高效的基本功能如自动剪线、自动倒回缝和气动抬压脚
- ☑ ø32超大旋梭比标准旋梭增加了70%的梭线容量，提高了工作效率

Scope of sewing

- ☑ The maximum pin length is 9mm （“K”为12mm）
- ☑ The roughest stitches are Nm10/3（“K”为Nm8/3）
- ☑ The maximum sewing speed is 3000 stitches/min （“K” is 1500 stitches/min）

Product Features

- ☑ The powerful three - step feeding system with bottom feed,needle feed and alternating top feed guarantees trouble-free and displacement-free material feed
- ☑ The lifting height of the pressure foot can reach 20mm, which is convenient to handle large area of joint material
- ☑ The high top feed stroke up 9 mm allows a sefeclimbing over differently high material plies
- ☑ The large clearance (335 mm wide and 125 mm high) facilitates the handing of large-area workpieces
- ☑ Efficient basic functions such as automatic line cutting, automatic back seam and gas Presser foot
- ☑ Increased productivity due to the ø32 hook with a 70% higher bobbin capacity in comparison to thestangdard hook


867-120226
867-121226
867-120232
867-121232
867-120232K
867-121232K



应用 Applications



功能 Function

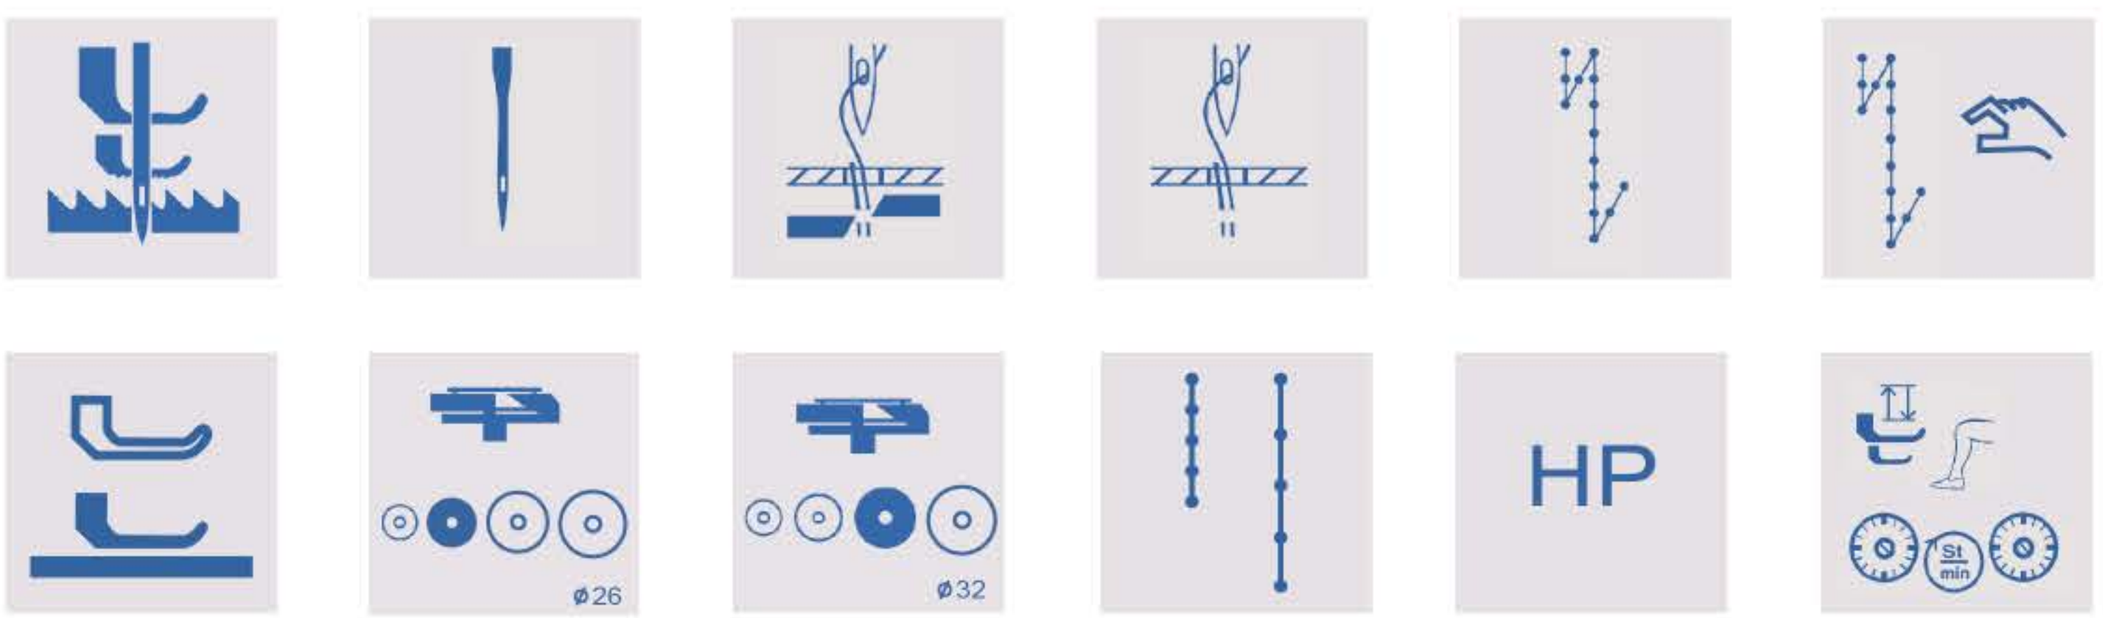

工作范围

- ☑ 最大针码长度为9mm（“K”为12mm）
- ☑ 最粗缝线为Nm10/3（“K”为Nm5/3）
- ☑ 最高缝速为3000针/分（“K”为1500针/分）

Scope of sewing

- ☑ The maximum pin length is 9mm （“K”为12mm）
- ☑ The roughest stitches are Nm10/3（“K”为Nm8/3）
- ☑ The maximum sewing speed is 3000 stitches/min （“K” is 1500 stitches/min）

产品特点

- ☑ 强劲的三同步送料系统包括下送料，针送料和交替压脚上送料，确保面料的无忧输送且无移位
- ☑ 压脚抬升高度可达20mm，便于处理大面积缝料
- ☑ 压脚冲程最大可达9mm，允许安全爬越不同缝料的厚度
- ☑ 超大臂下空间（335mm宽和125mm高）便于操作大面积缝料
- ☑ 高效的基本功能如自动剪线、自动倒回缝和气动抬压脚
- ☑ ø32超大旋梭比标准旋梭增加了70%的梭线容量，提高了工作效率

Product Features

- ☑ The powerful three - step feeding system with bottom feed,needle feed and alternating top feed guarantees trouble-free and displacement-free material feed
- ☑ The lifting height of the pressure foot can reach 20mm, which is convenient to handle large area of joint material
- ☑ The high top feed stroke up 9 mm allows a sefeclimbing over differently high material plies
- ☑ The large clearance (335 mm wide and 125 mm high) facilitates the handing of large-area workpieces
- ☑ Efficient basic functions such as automatic line cutting, automatic back seam and gas Presser foot
- ☑ Increased productivity due to the ø32 hook with a 70% higher bobbin capacity in comparison to thestangdard hook




867-210126
867-211126
867-210132
867-211132
867-210132K
867-211132K

应用 Applications



功能 Function

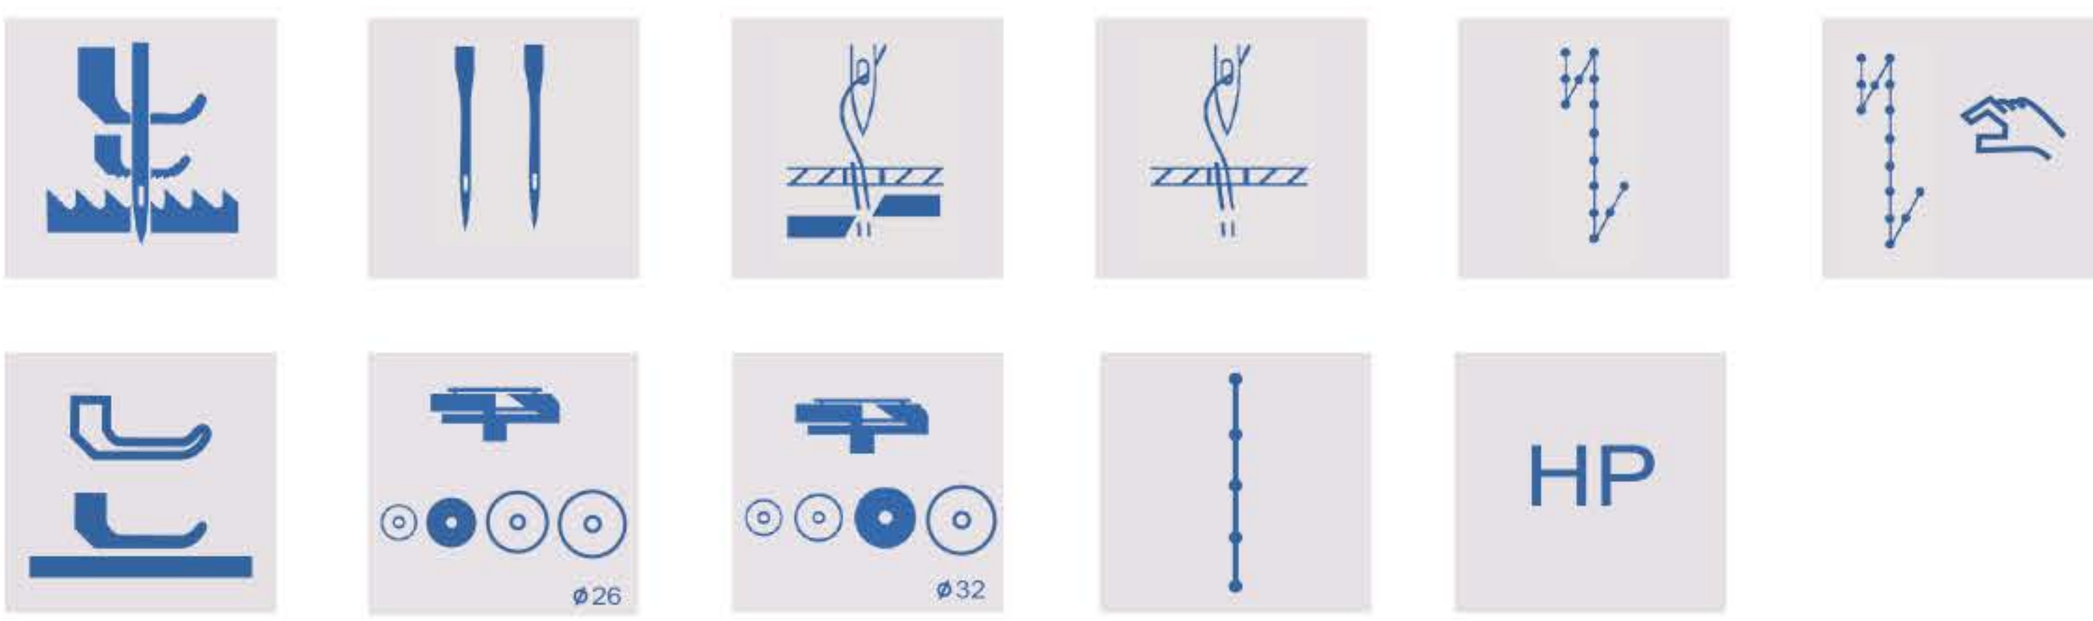

工作范围

- ☑ 最大针码长度为9mm（“K”为12mm）
- ☑ 最粗缝线为Nm10/3 （“K”为Nm5/3）
- ☑ 最高缝速为3000针/分（“K”为1500针/分）

产品特点


- ☑ 强劲的三同步送料系统包括下送料，针送料和交替压脚上送料，确保面料的无忧输送且无移位
- ☑ 压脚抬升高度可达20mm，便于处理大面积缝料
- ☑ 压脚冲程最大可达9mm，允许安全爬越不同缝料的厚度
- ☑ 超大臂下空间（335mm宽和125mm高）便于操作大面积缝料
- ☑ 高效的基本功能如自动剪线、自动倒回缝和气动抬压脚
- ☑ ø32超大旋梭比标准旋梭增加了70%的梭线容量，提高了工作效率

Scope of sewing

- ☑ The maximum pin length is 9mm （“K”为12mm）
- ☑ The roughest stitches are Nm10/3（“K”为Nm8/3）
- ☑ The maximum sewing speed is 3000 stitches/min （“K” is 1500 stitches/min）

Product Features

- ☑ The powerful three - step feeding system with bottom feed,needle feed and alternating top feed guarantees trouble-free and displacement-free material feed
- ☑ The lifting height of the pressure foot can reach 20mm, which is convenient to handle large area of joint material
- ☑ The high top feed stroke up 9 mm allows a sefeclimbing over differently high material plies
- ☑ The large clearance (335 mm wide and 125 mm high) facilitates the handing of large-area workpieces
- ☑ Efficient basic functions such as automatic line cutting, automatic back seam and gas Presser foot
- ☑ Increased productivity due to the ø32 hook with a 70% higher bobbin capacity in comparison to thestangdard hook

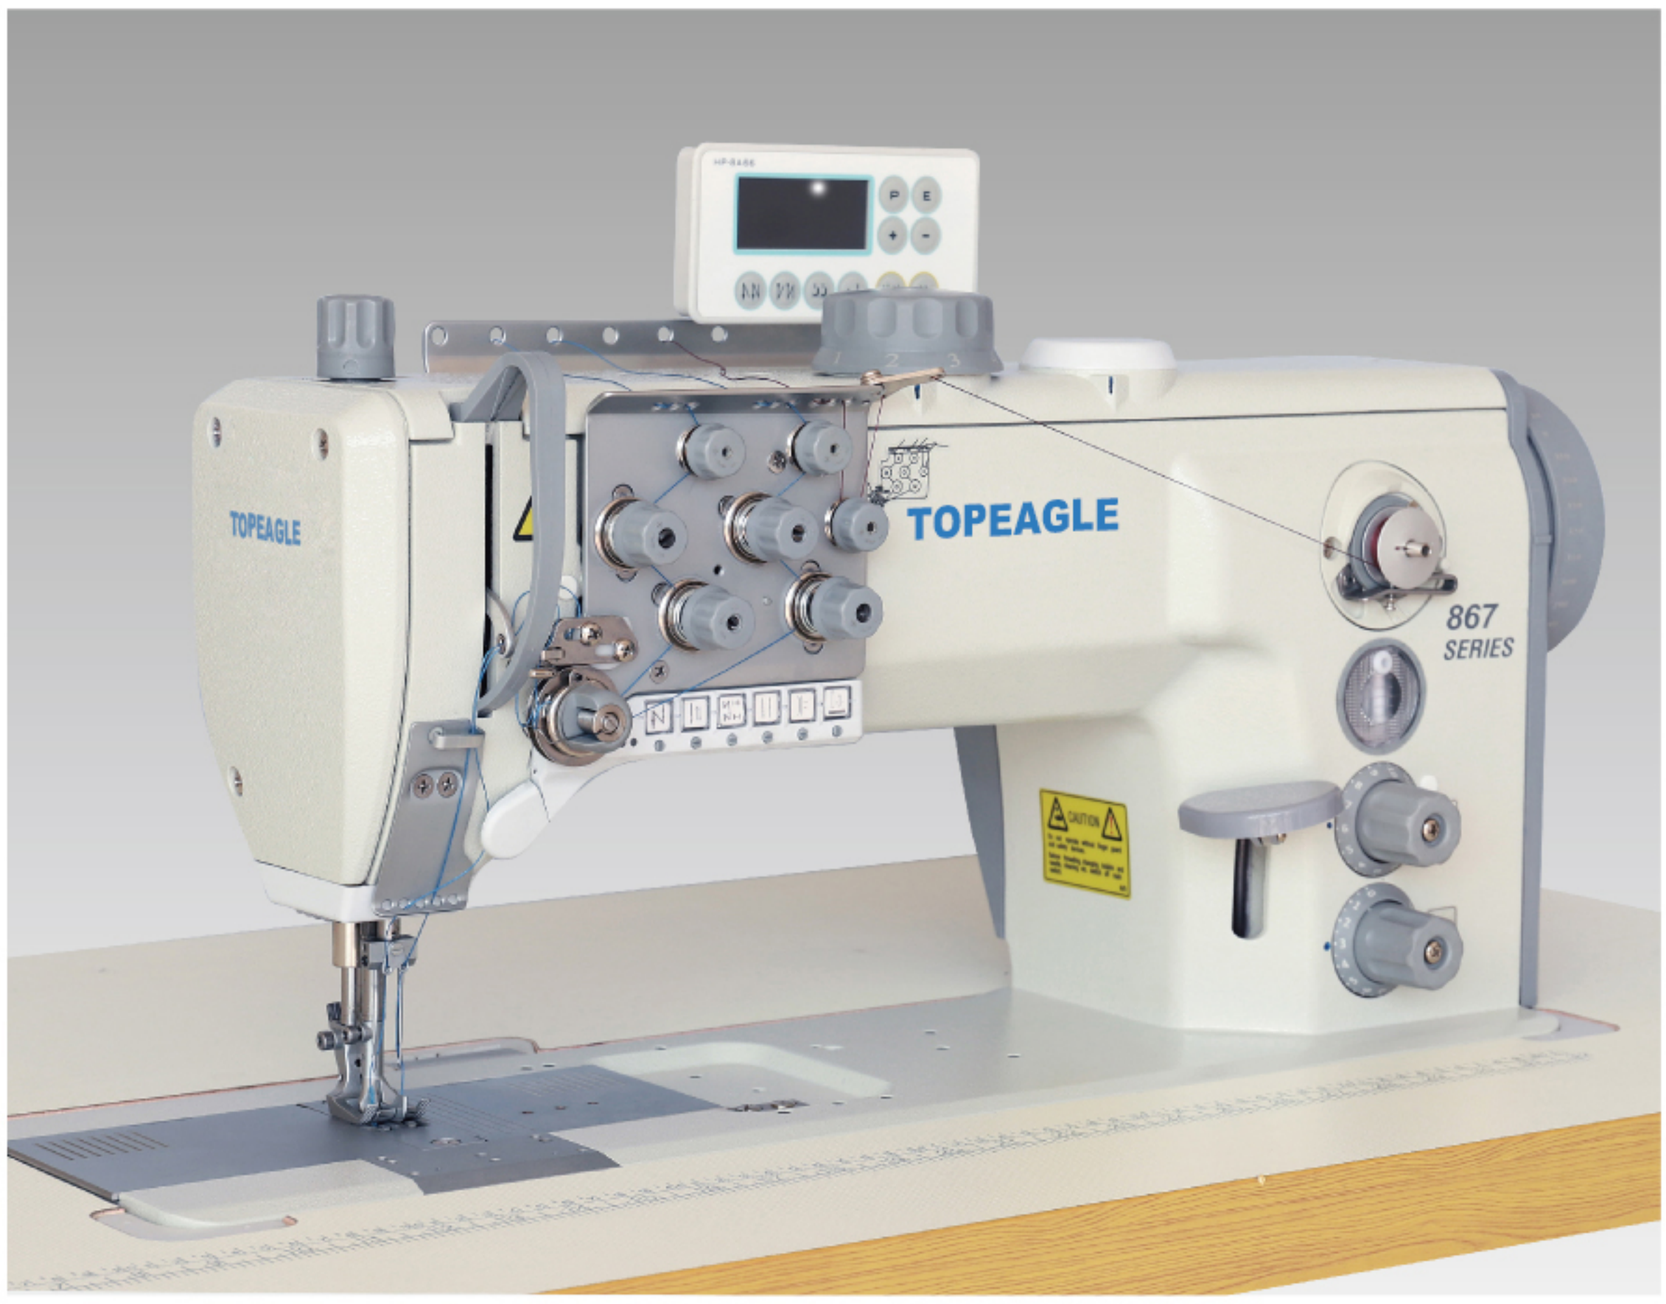


867-210226
867-211226
867-210232
867-211232
867-210232K
867-211232K

应用 Applications



功能 Function

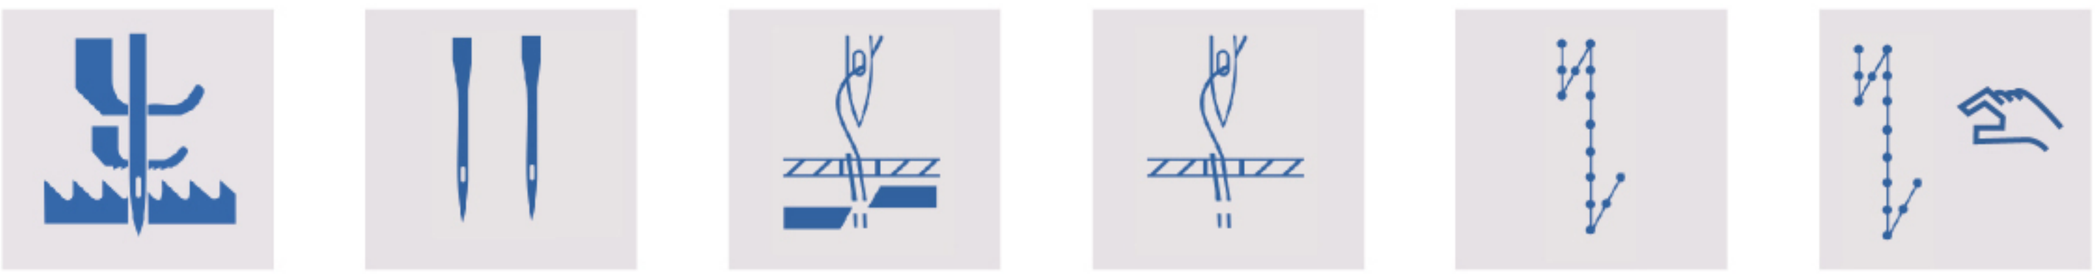

工作范围

- ☑ 最大针码长度为9mm（“K”为12mm）
- ☑ 最粗缝线为Nm10/3 （“K”为Nm5/3）
- ☑ 最高缝速为3000针/分（“K”为1500针/分）

产品特点

- ☑ 强劲的三同步送料系统包括下送料，针送料和交替压脚上送料，确保面料的无忧输送且无移位
- ☑ 压脚抬升高度可达20mm，便于处理大面积缝料
- ☑ 压脚冲程最大可达9mm，允许安全爬越不同缝料的厚度
- ☑ 超大臂下空间（335mm宽和125mm高）便于操作大面积缝料
- ☑ 高效的基本功能如自动剪线、自动倒回缝和气动抬压脚
- ☑ ø32超大旋梭比标准旋梭增加了70%的梭线容量，提高了工作效率

Scope of sewing

- ☑ The maximum pin length is 9mm （“K”为12mm）
- ☑ The roughest stitches are Nm10/3（“K”为Nm8/3）
- ☑ The maximum sewing speed is 3000 stitches/min （“K” is 1500 stitches/min）

Product Features

- ☑ The powerful three - step feeding system with bottom feed,needle feed and alternating top feed guarantees trouble-free and displacement-free material feed
- ☑ The lifting height of the pressure foot can reach 20mm, which is convenient to handle large area of joint material
- ☑ The high top feed stroke up 9 mm allows a sefeclimbing over differently high material plies
- ☑ The large clearance (335 mm wide and 125 mm high) facilitates the handing of large-area workpieces
- ☑ Efficient basic functions such as automatic line cutting, automatic back seam and gas Presser foot
- ☑ Increased productivity due to the ø32 hook with a 70% higher bobbin capacity in comparison to thestangdard hook




867-220126
867-221126
867-220132
867-221132
867-220132K
867-221132K

应用 Applications



功能 Function

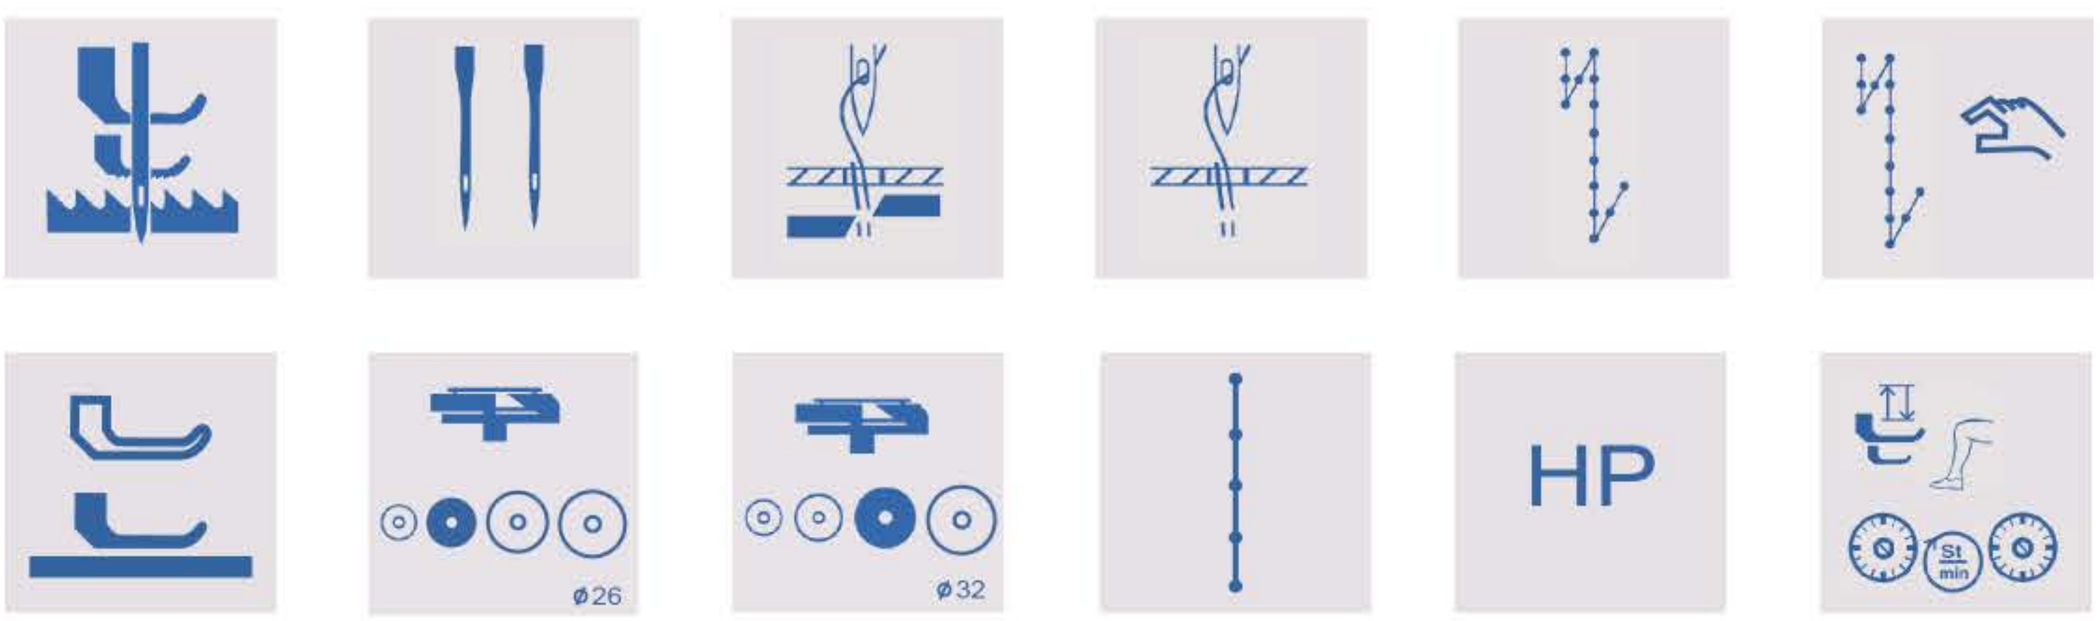

工作范围

- ☑ 最大针码长度为9mm（“K”为12mm）
- ☑ 最粗缝线为Nm10/3 （“K”为Nm5/3）
- ☑ 最高缝速为3000针/分（“K”为1500针/分）

产品特点


- ☑ 强劲的三同步送料系统包括下送料，针送料和交替压脚上送料，确保面料的无忧输送且无移位
- ☑ 压脚抬升高度可达20mm，便于处理大面积缝料
- ☑ 压脚冲程最大可达9mm，允许安全爬越不同缝料的厚度
- ☑ 超大臂下空间（335mm宽和125mm高）便于操作大面积缝料
- ☑ 高效的基本功能如自动剪线、自动倒回缝和气动抬压脚
- ☑ ø32超大旋梭比标准旋梭增加了70%的梭线容量，提高了工作效率

Scope of sewing

- ☑ The maximum pin length is 9mm （“K”为12mm）
- ☑ The roughest stitches are Nm10/3（“K”为Nm8/3）
- ☑ The maximum sewing speed is 3000 stitches/min （“K” is 1500 stitches/min）

Product Features

- ☑ The powerful three - step feeding system with bottom feed,needle feed and alternating top feed guarantees trouble-free and displacement-free material feed
- ☑ The lifting height of the pressure foot can reach 20mm, which is convenient to handle large area of joint material
- ☑ The high top feed stroke up 9 mm allows a sefeclimbing over differently high material plies
- ☑ The large clearance (335 mm wide and 125 mm high) facilitates the handing of large-area workpieces
- ☑ Efficient basic functions such as automatic line cutting, automatic back seam and gas Presser foot
- ☑ Increased productivity due to the ø32 hook with a 70% higher bobbin capacity in comparison to thestangdard hook

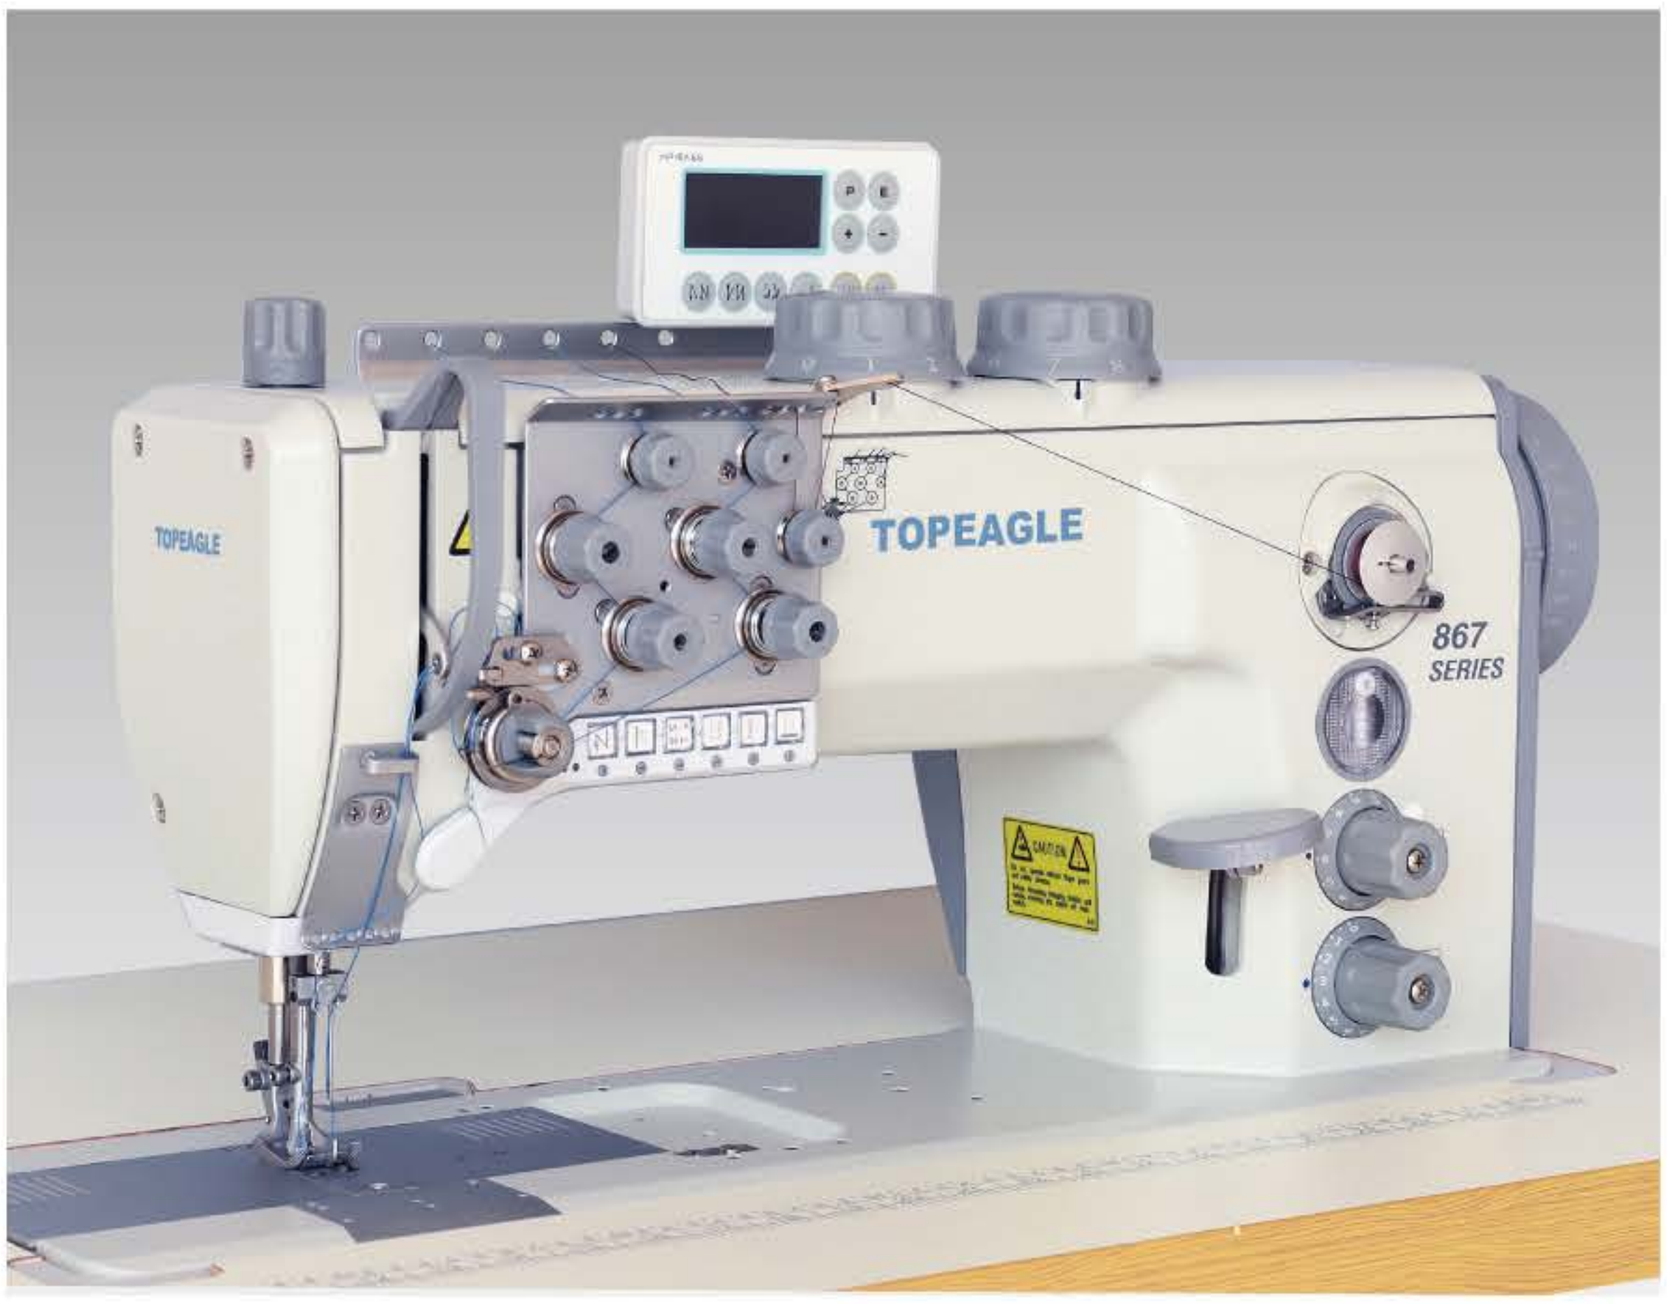


867-220226
867-221226
867-220232
867-221232
867-220232K
867-221232K

应用 Applications



功能 Function

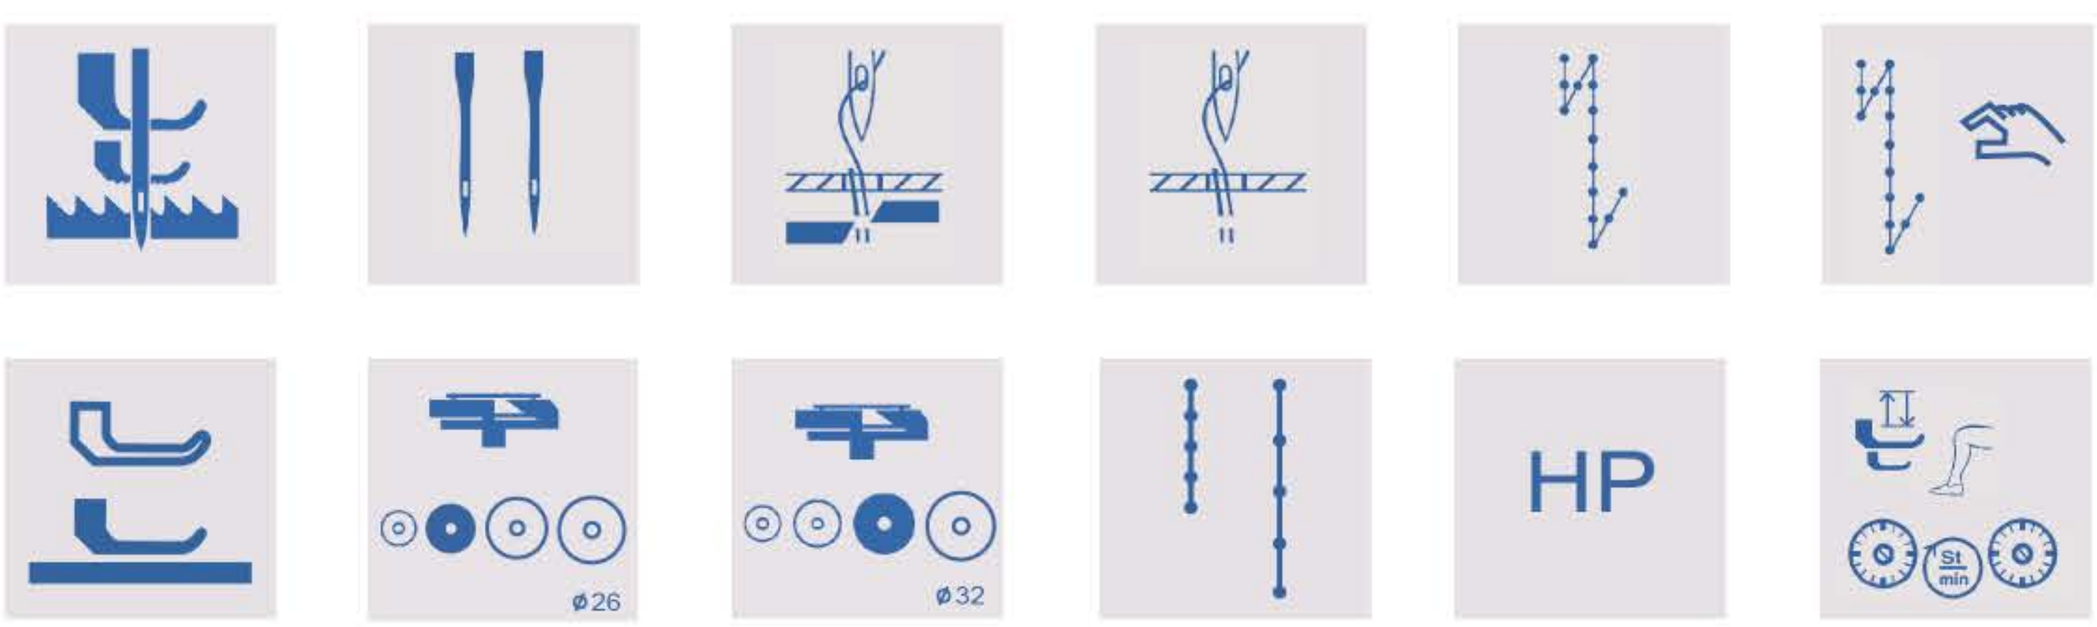

工作范围

- ☑ 最大针码长度为9mm（“K”为12mm）
- ☑ 最粗缝线为Nm10/3（“K”为Nm5/3）
- ☑ 最高缝速为3000针/分（“K”为1500针/分）

产品特点

- ☑ 强劲的三同步送料系统包括下送料，针送料和交替压脚上送料，确保面料的无忧输送且无移位
- ☑ 压脚抬升高度可达20mm，便于处理大面积缝料
- ☑ 压脚冲程最大可达9mm，允许安全爬越不同缝料的厚度
- ☑ 超大臂下空间（335mm宽和125mm高）便于操作大面积缝料
- ☑ 高效的基本功能如自动剪线、自动倒回缝和气动抬压脚
- ☑ ø32超大旋梭比标准旋梭增加了70%的梭线容量，提高了工作效率

Scope of sewing

- ☑ The maximum pin length is 9mm （“K”为12mm）
- ☑ The roughest stitches are Nm10/3（“K”为Nm8/3）
- ☑ The maximum sewing speed is 3000 stitches/min （“K” is 1500 stitches/min）

Product Features

- ☑ The powerful three - step feeding system with bottom feed,needle feed and alternating top feed guarantees trouble-free and displacement-free material feed
- ☑ The lifting height of the pressure foot can reach 20mm, which is convenient to handle large area of joint material
- ☑ The high top feed stroke up 9 mm allows a sefeclimbing over differently high material plies
- ☑ The large clearance (335 mm wide and 125 mm high) facilitates the handing of large-area workpieces
- ☑ Efficient basic functions such as automatic line cutting, automatic back seam and gas Presser foot
- ☑ Increased productivity due to the ø32 hook with a 70% higher bobbin capacity in comparison to thestangdard hook



Developed
IN GERMANY

西安鹰高进出口有限公司

TOPEAGLE INTNERNATIONAL LTD.

地址：西安市高新区丈八二路31号

ADDRESS: NO. 31 ZHANGBA ER ROAD. XI'AN CHINA, 710065

电话(TEL)： **0086-29-68723798**

传真(FAX)： **0086-29-68723818**

E-MAIL: SALE@EAGLECO.CN

网站： **WWW.TOPEAGLESEWING.COM**